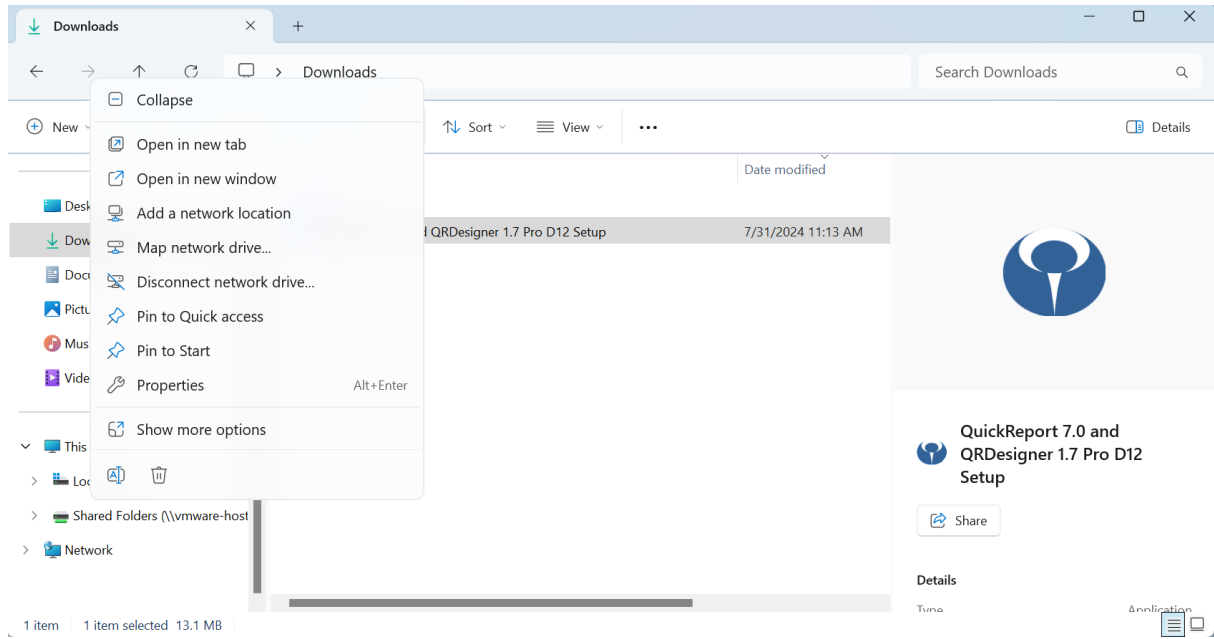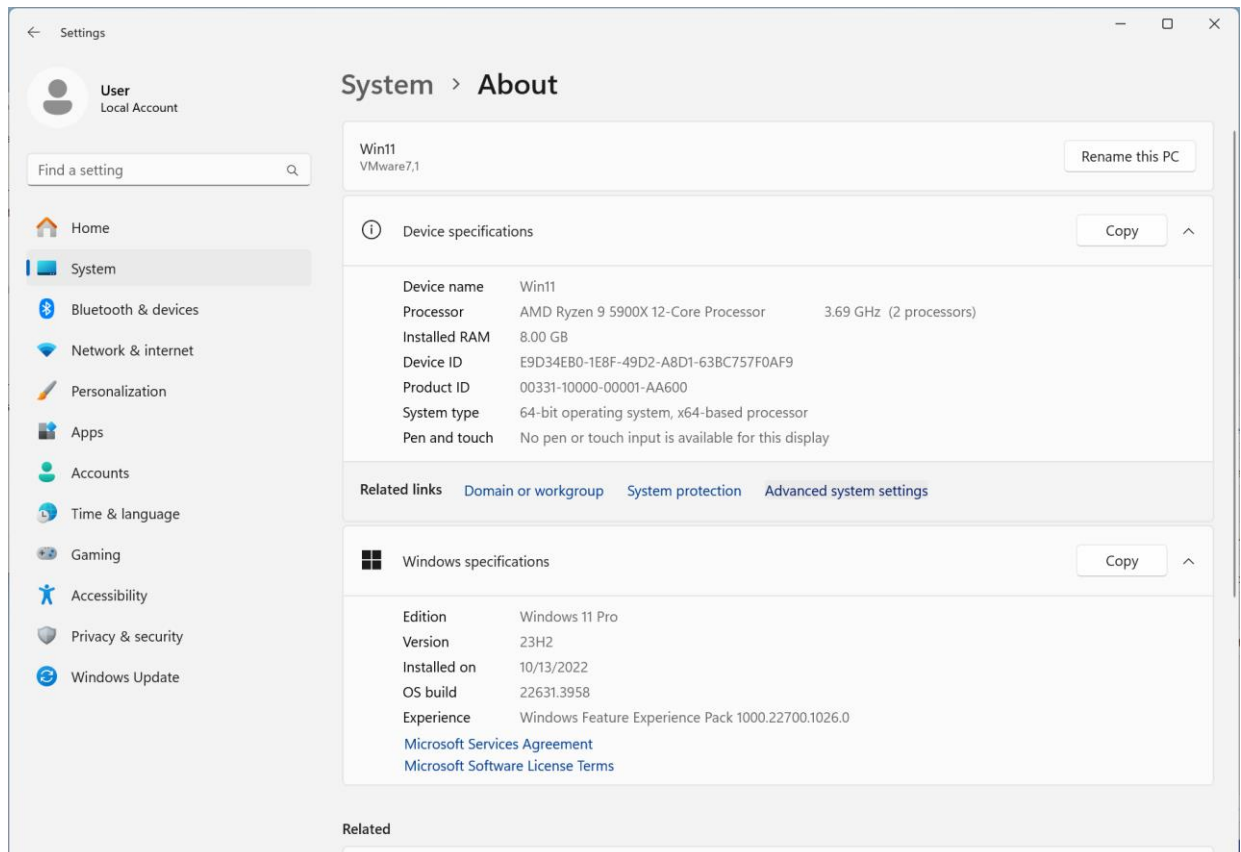Installing QuickReport

- Download the QuickReport distribution from the provided link

- Run QuickReport 7.0 and QRDesigner 1.7 Pro D12 Setup.exe and follow the installation wizard instructions

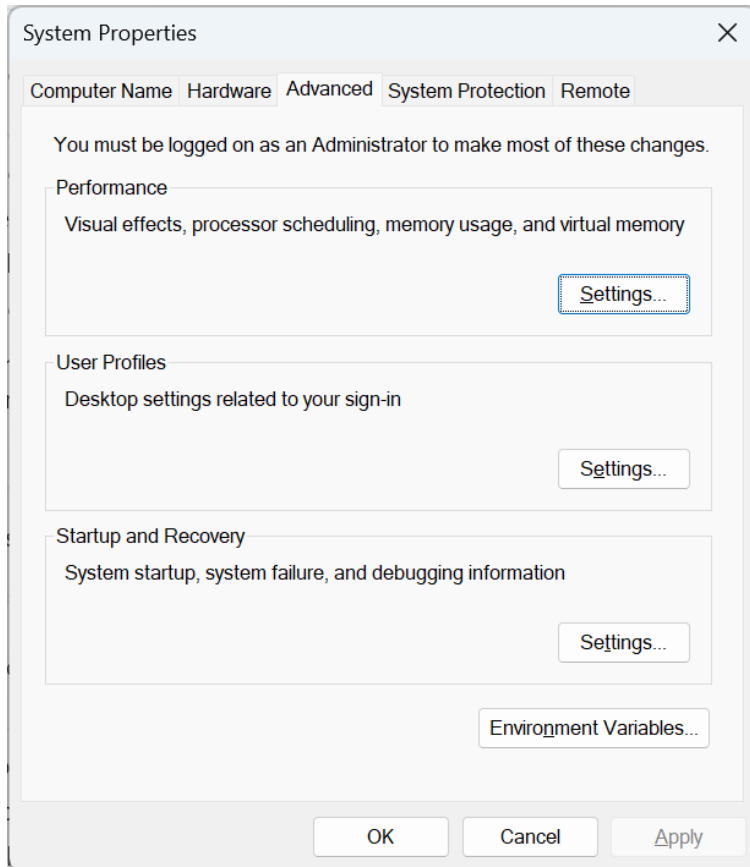- Check if you have system paths to BPL and DCP. To do this

o In Windows Explorer, right-click on This PC and select Properties from the menu
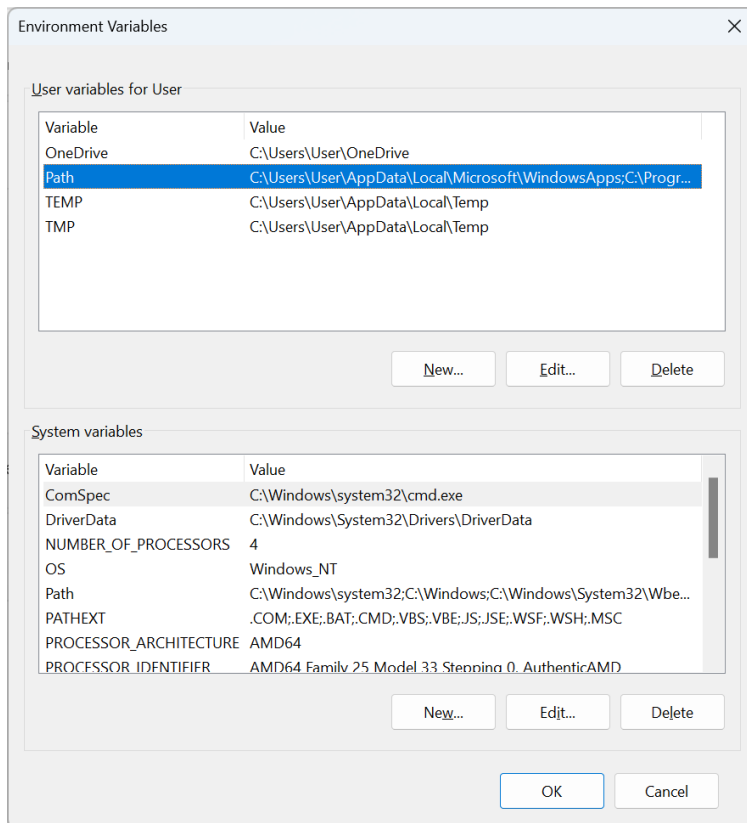

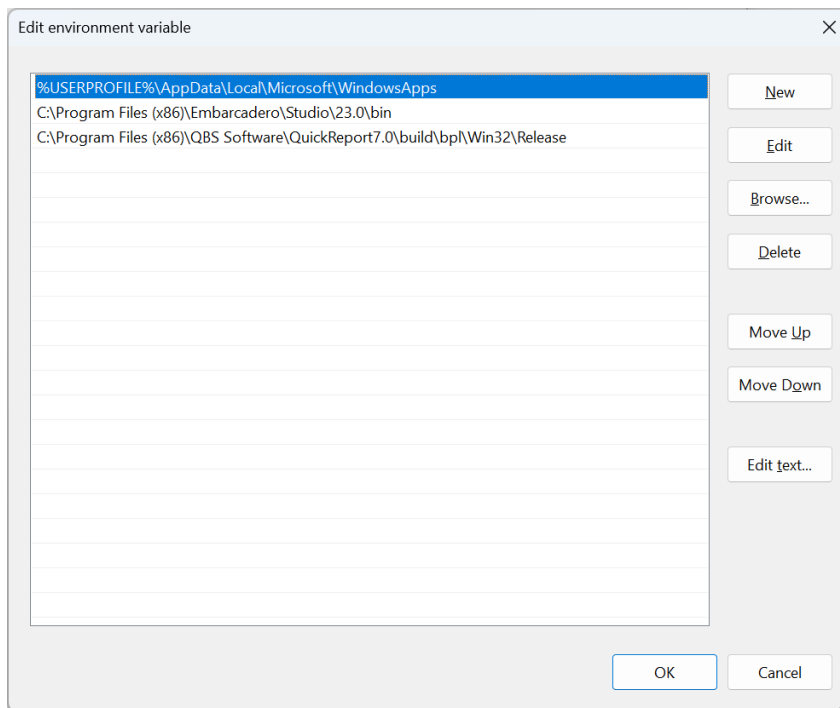In the window that appears, click on Advanced system settings

Next, on Environment Variables

There you need a line with Variable Path:

Stand on it, click Edit...

Use the New button to add a new line and enter the path there.

Check and, if necessary, add the paths to the Delphi bin directory (usually, C:\Program Files (x86)\Embarcadero\Studio\23.0\bin) and to the Quick Report bpl directory (by default, C:\Program Files (x86)\QBS Software\QuickReport7.0\build\bpl\Win32\Release)

Now click Ok, Ok, Ok and reboot the machine.

Quick Report is installed and ready to use!

P.S. From the command line, you can view the contents of the Path variable using the SET command and set a new one using the SETX command. In Powershell, use Get-ChildItem Env and SetEnvironmentVariable.